

## DESCRIPTION

The CTD8103 evaluation board is designed to test the functionality of the CT813x sensor family. For more information on each sensor, refer to the CT8132 data sheet. The CT813x series of omnipolar tunnel magnetoresistance (TMR) digital switches are designed for consumer and industrial applications. The devices are based on Allegro patented XtremeSense™ TMR technology with integrated CMOS process to provide a monolithic solution for superior sensing performance. The CT813x digital switches offer stable magnetic operation over the operating temperature range. This product family has very low power consumption—as low as 110 nA—which is ideal for battery-operated products where minimal current consumption is required. The devices support magnetic fields down to 9 G for applications where there is a large air gap requirement.

## FEATURES

- Sensitivity with  $B_{OP}$  range: 9 to 70 G
- Ultra-low power consumption:  $\sim 110$  nA @  $V_{DD} = 1.8$  V and  $f_S = 2$  Hz
- Sensor polarity: omnipolar, bipolar, unipolar

## EVALUATION BOARD CONTENTS


- CTD8103 Evaluation Board

**Table 1: CTD8103 Evaluation Board Configurations**

Configuration Name	Part Number
CTD8103	CT8132SK-IS3
	CT8132BV-IS3
	CT8132EK-IS3
	CT8132DM-IS3
	CT8111DK-IS3
	CT8122AN-IS3
	CT8150PC-IS3

**Table 2: General Specifications**

Specification	Min	Nom	Max	Units
Supply Voltage Range	1.7	3.3	5.5	V
Output Voltage Range	0	–	5.5	V
Outout Current	–3.0	–	3.0	mA
Bypass Capacitor	–	1.0	–	$\mu$ F
Operating Magnetic Flux	–450	–	450	G
Operating Temperature	–40	25	85	°C

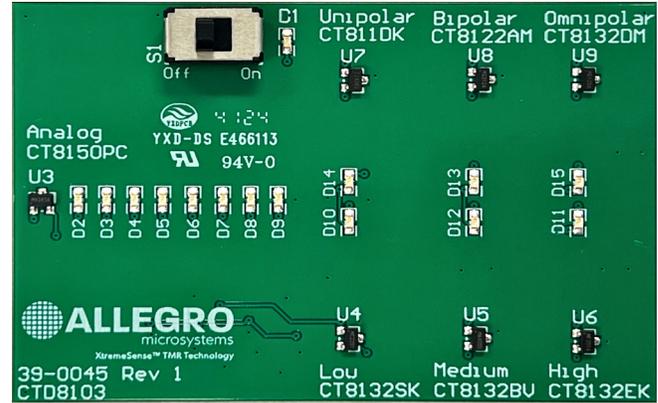

**Figure 1: CTD8103 Evaluation Board**

## Table of Contents

Description .....	1
Features .....	1
Evaluation Board Contents .....	1
Using the Evaluation Board .....	2
Schematic .....	3
Layout .....	4
Bill of Materials .....	5
Related Links .....	6
Revision History .....	7

## USING THE EVALUATION BOARD

This section provides an overview of the connections and configuration options of the EVB8103 Evaluation Board evaluation board. Figure 2 highlights the proper configuration and is detailed below. The CT81xx and CT815x datasheets each contain detailed information on the use and functionality of each pin, as well as detailed specifications about the sensor, and should be consulted for more detailed information than is contained in this user guide.

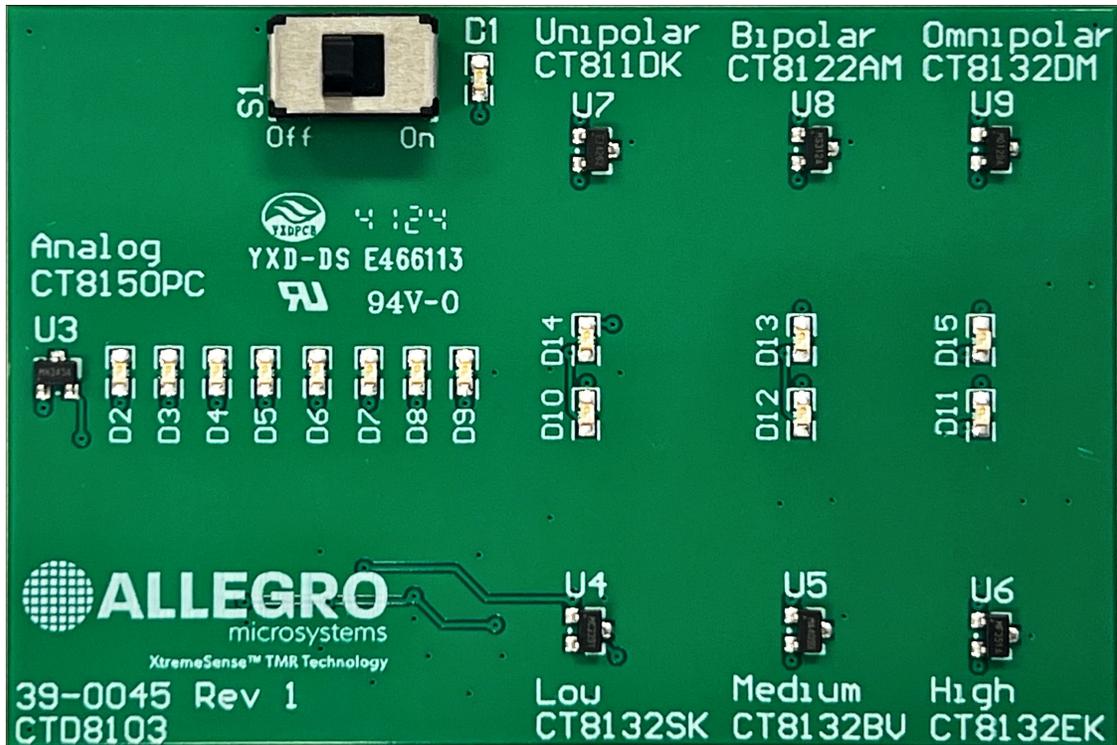


Figure 2: CTD8103 Evaluation Board connections

### Power Input and Board Configuration

First, turn the switch on to power on the board. Make sure the battery is in place. Once the switch is on, the sensors are responsive to magnetic fields and indicate their powered state by flashing the LEDs on the board. Holding a magnet to each sensor activates the corresponding LED. For the unipolar sensor, a magnet held in front of the sensor turns on the LED, and removing the magnet turns off the LED. For the bipolar sensor, holding a magnet in front of the sensor or behind the sensor turns on the LED. For the omnipolar switch, holding a magnet in front of the sensor turns on the LED, and holding a magnet behind the sensor turns off the LED. This board is designed to test and compare the functionalities of each sensor.

# SCHEMATIC

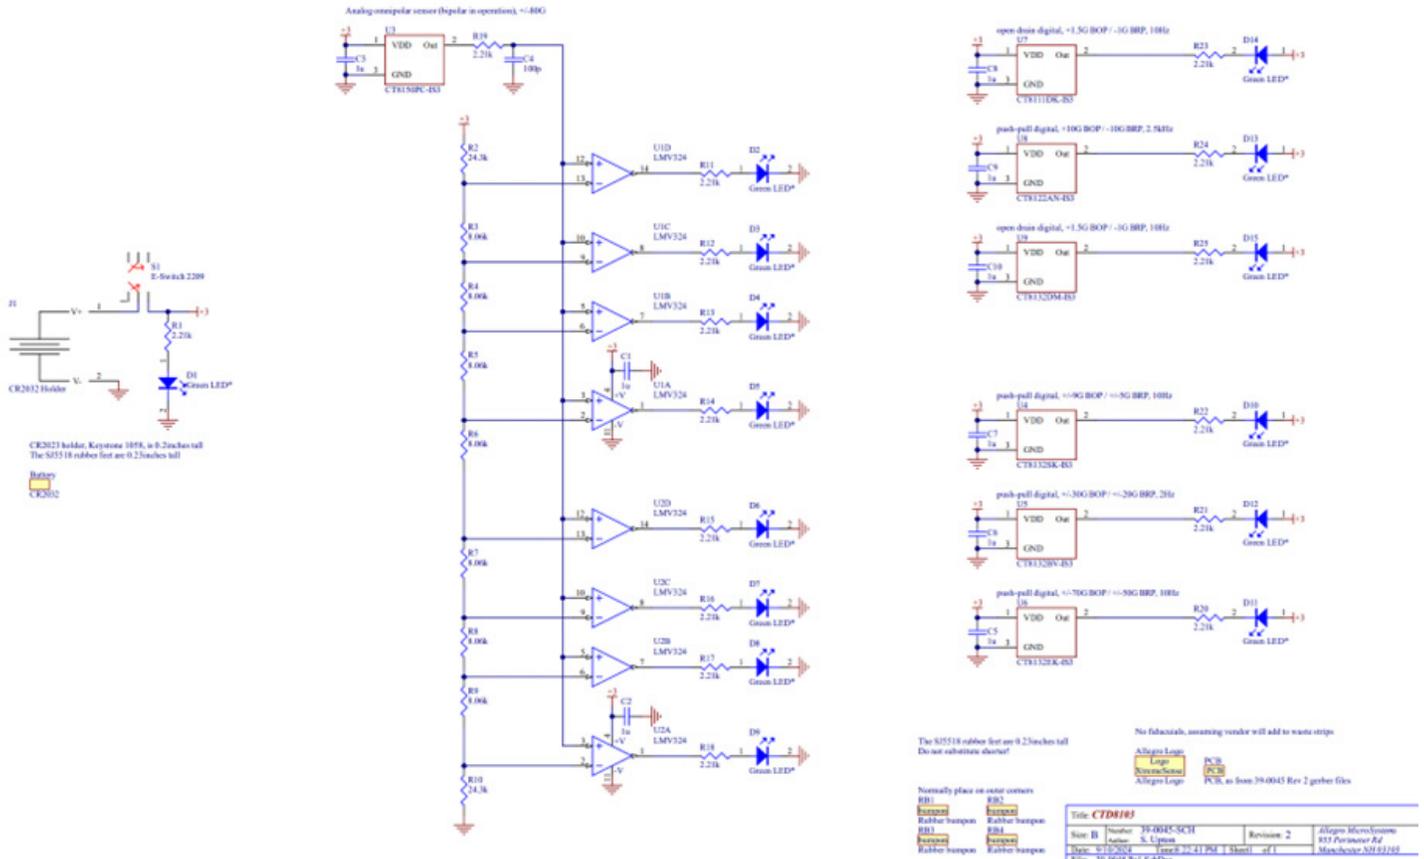


Figure 3: CTD8103 Evaluation Board schematic

# LAYOUT

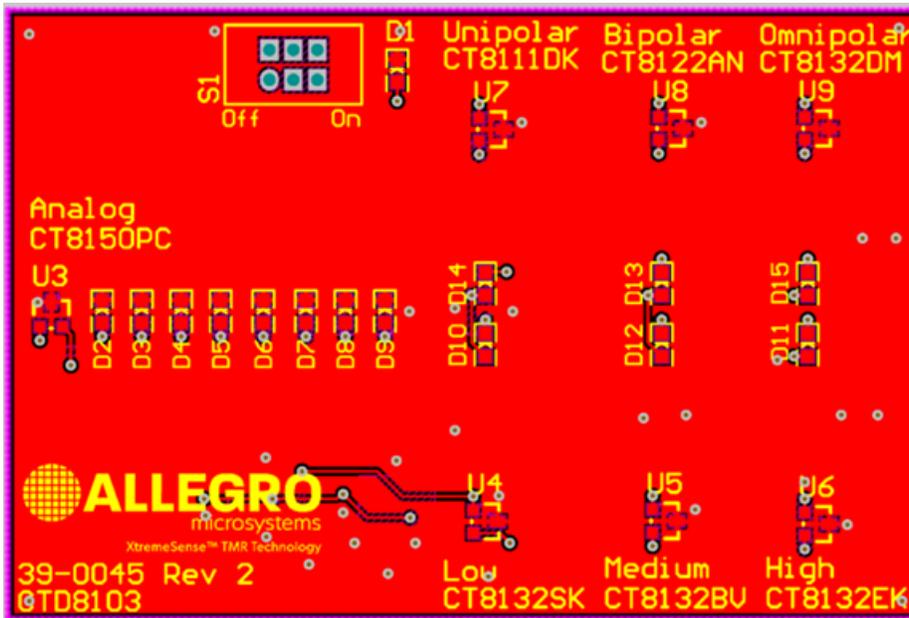


Figure 4: CTD8103 Evaluation Board top layer

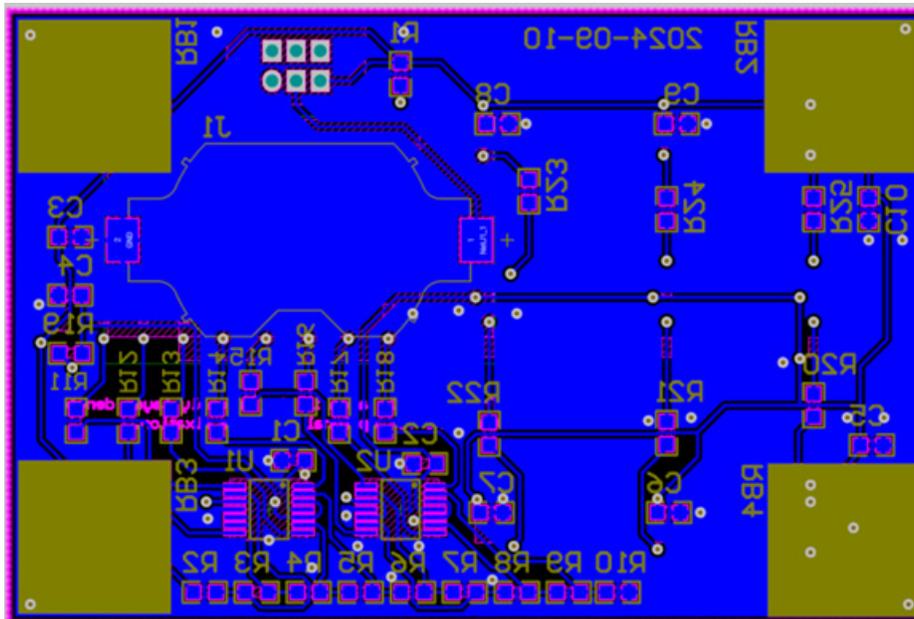


Figure 5: CTD8103 Evaluation Board bottom layer

## BILL OF MATERIALS

Table 3: CTD8103 Evaluation Board Bill of Materials

ELECTRICAL COMPONENTS				
Designator	Quantity	Description	Manufacturer	Manufacturer Part Number
PCB	1	CTD8103 PCB	Allegro MicroSystems	–
U1, U2	2	LMV324, IC, TSSOP14, quad op-amp	Texas Instruments	LMV324 IC
U3	1	CT8150PC-IS3	Allegro MicroSystems	–
U4	1	CT8132SK-IS3	Allegro MicroSystems	–
U5	1	CT8132BV-IS3	Allegro MicroSystems	–
U6	1	CT8132EK-IS3	Allegro MicroSystems	–
U7	1	CT8111DK-IS3	Allegro MicroSystems	–
U8	1	CT8122AN-IS3	Allegro MicroSystems	–
U9	1	CT8132DM-IS3	Allegro MicroSystems	–
S1	1	Switch Slide DPDT 100 mA 12 V	E-Switch	EG2209
Battery	1	CR2032 battery 3 V	Panasonic - BSG	CR2032
C1, C2, C3, C5, C6, C7, C8, C9, C10	9	1 $\mu$ F Capacitor, 0603, monolythic, X7R	Kemet	C0603X105K4RACAUTO7411
C4	1	100 pF Capacitor, 0603, monolythic, COG, 50 V	Kemet	C0603C101J5GAC7411
D1–15	15	LED, 0603, 2.65 V, green, 50mcd at 2 mA	Kingbright	APHD1608LCGCK
R1, R11–25	16	2.21 k $\Omega$ Resistor, 0603, 100 mW, thick film, 1%	Panasonic	ERJ3EKF2211V
R2, R10	2	24.3 k $\Omega$ Resistor, 0603, 100 mW, thick film, 1%	Yageo	RC0603FR-1024K3L
R3–9	7	8.06 k $\Omega$ Resistor, 0603, 100 mW, thick film, 1%	Vishay	RCA06038K06FKEA
OTHER COMPONENTS				
Designator	Quantity	Description	Manufacturer	Manufacturer Part Number
J1	1	CR2032 Battery Holder	Adam Tech	BH-25E-1
RB1, RB2, RB3, RB4	4	Bumpon, rubber, 0.5 inch square, black	3M	SJ5012-0-ND

---

## RELATED LINKS

<https://www.allegromicro.com/en/products/sense/switches-and-latches/micropower-switches-latches/ct811-2-3>

---

## Revision History

Number	Date	Description
-	December 12, 2024	Initial release

Copyright 2024, Allegro MicroSystems.

Allegro MicroSystems reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.

Allegro's products are not to be used in any devices or systems, including but not limited to life support devices or systems, in which a failure of Allegro's product can reasonably be expected to cause bodily harm.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

Copies of this document are considered uncontrolled documents.